




## UL (Arrowtite)

LFMC : Liquidtight Flexible Metal Conduit UL360

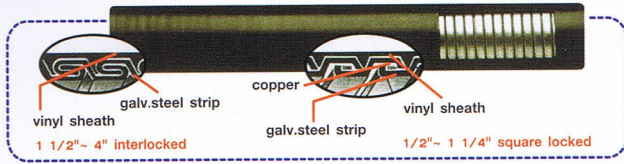

Nominal Size (Inch.)	Inter Diameter		Outside Diameter		Vinyl Sheath Thickness mm.	Min. Bending Radius mm.	Length of Each Roll	
	min mm.	max mm.	min mm.	max mm.			ft.	m.
	1/2"	15.80	16.31	20.80				
3/4"	20.83	21.34	25.80	26.70	0.89	200	100	30
1"	26.44	27.08	32.80	33.40	0.89	330	100	30
1 1/4"	35.05	35.81	41.40	42.20	0.89	400	50	15
1 1/2"	40.10	40.64	47.40	48.30	1.02	450	50	15
2"	51.31	51.94	59.40	60.30	1.02	560	50	15
2 1/2"	62.99	63.63	72.10	73.00	1.27	700	25	7.5
3"	77.98	78.74	87.90	88.90	1.27	800	25	7.5
4"	101.60	102.62	113.30	114.30	1.52	1200	25	7.5

The above data might be changed without prior notice . Special sizes are available on request.

**Product :**


- Hot-dip galvanized steel strip with copper wire.
- Extra water proof and oil resistant.
- High tension and flexibility.
- Heavy duty PVC jacket in grey and black color.

**Application :** Seals out abrasives, alcohol, fumes, gases, dirt, water and spray suitable for the following potentials :

- Direct burial.
- Machine tools.
- Silo and plant.
- Food manufacturing and process equipment.
- High rise buildings.
- Water treatment, Sewage equipment.
- Security.

## EF-Interlocked (Arrowtite)

LFMC ; Liquidtight Flexible Metal Conduit EF-Interlocked

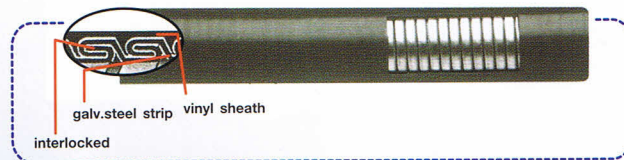

Nominal Size (Inch.)	Inter Diameter		Outside Diameter		P.V.C. Jetket Thickness		Min. Bending Radius mm.	Length of Each Roll	
	min mm.	max mm.	min mm.	max mm.	min mm.	max mm.		ft.	m.
	1/2"	15.70	16.30	20.80	21.30	1.00			
3/4"	20.70	21.30	26.00	26.70	1.10	1.55	100	100	30
1"	26.20	26.90	32.70	33.40	1.70	1.95	180	100	30
1 1/4"	35.10	35.70	41.50	42.20	1.25	1.70	200	50	15
1 1/2"	40.20	40.80	47.40	48.30	1.80	2.30	250	50	15
2"	51.00	51.80	59.40	60.30	2.40	2.80	450	50	15
2 1/2"	62.50	64.00	72.10	73.00	2.00	2.50	550	25	7.5
3"	77.60	78.80	87.70	88.90	2.50	3.20	800	25	7.5
4"	101.10	102.50	113.20	114.30	2.80	3.03	1200	25	7.5

The above data might be changed without prior notice . Special sizes are available on request.

**Product :**

- Galvanized steel strip, interlocked
- Water-proof
- Water and Moisture Resistant.
- High flexibility suitable to a wide range of application.
- PVC jacket in grey and black color.

**Application :** Seals out abrasives, alcohol, fumes, gases, dirt, water and spray suitable for the following potentials :

- Machine tools.
- Silo and plant.
- High rise buildings.
- Air conditioning and ventilation.
- Computer.
- Security.