


Combination (EMT/IMC/RIGID) T Type Dişli ve Vidalı Girişli, T Tipi

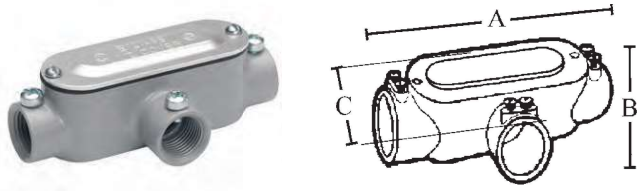

Features

- Set screw and threaded T type with cover and gasket
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material


- Copper free aluminum die cast
- Steel screws

Standard Finish

- Powder coat

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight / Case	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-T-50-CG	1/2"	1	6 AWG	10	100	38	4.720	1.370	2.060
E-T-75-CG	3/4"	2	6 AWG	10	50	30	5.570	1.625	2.335
E-T-100-CG	1"	3	6 AWG	10	100	20	6.460	1.900	2.705
E-T-125-CG	1-1/4"	3	2 AWG	2	10	19	8.528	2.770	3.630
E-T-150-CG	1-1/2"	3	2 AWG	2	10	21	8.528	2.770	3.630
E-T-200-CG	2"	3	2/0 AWG	—	2	5	10.831	3.335	3.980
E-T-250-CG	2-1/2"	3	4/0 AWG	—	1	8	13.500	4.060	5.825
E-T-300-CG	3"	3	250 MCM	—	1	8	13.500	4.685	5.825
E-T-350-CG	3-1/2"	3	350 MCM	—	1	11	15.937	5.450	7.060
E-T-400-CG	4"	4	350 MCM	—	1	11	15.937	5.450	7.060

Combination (EMT/IMC/RIGID) X Type Dişli ve Vidalı Girişli, X Tipi

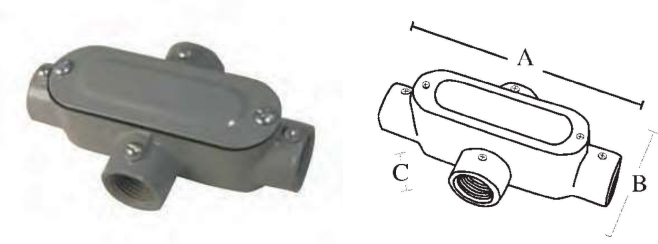

Features

- Set screw and threaded X type with cover and gasket
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws

Standard Finish

- Powder coat

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight / Case	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-X-50-CG	1/2"	2	6 AWG	5	50	20	4.750	2.690	1.850
E-X-75-CG	3/4"	2	6 AWG	5	25	16	5.500	3.000	1.880
E-X-100-CG	1"	3	6 AWG	2	10	7	6.500	3.500	2.150
E-X-125-CG	1-1/4"	3	2 AWG	1	5	9	8.250	4.500	2.750
E-X-150-CG	1-1/2"	3	2 AWG	1	5	10	8.250	4.500	2.750
E-X-200-CG	2"	3	2/0 AWG	1	2	6	10.500	5.380	3.630
E-X-250-CG	2-1/2"	3	4/0 AWG	—	1	8	13.500	5.380	5.825
E-X-300-CG	3"	3	250 MCM	—	1	8	13.000	5.450	5.825
E-X-350-CG	3-1/2"	3	350 MCM	—	1	11	15.950	5.450	7.060
E-X-400-CG	4"	4	350 MCM	—	1	11	15.950	5.450	7.060