


ELBOWS, COUPLINGS AND NIPPLES

Rigid Elbows

90° - Galvanized Steel

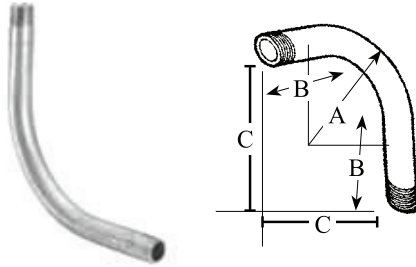

Features

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

Applications

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

Standard Material

- Galvanized steel


Catalog Number	Size	Ship Case	Weight/Case	(A) Min. UL Radius	(B) Straight Leg Each End	(C) Offset
E-TRE 1/2	1/2"	50	40	4.00	2.875	6.343
E-TRE 3/4	3/4"	50	54	4.50	2.875	6.781
E-TRE 1	1"	20	40	5.750	3.00	8.901
E-TRE 1 1/4	1-1/4"	20	60	7.250	3.25	10.25
E-TRE 1 1/2	1-1/2"	10	42	8.250	3.625	11.937
E-TRE 2	2"	10	68	9.50	4.1875	14.031
E-TRE 2 1/2	2-1/2"	1	13	10.50	5.25	16.00
E-TRE 3	3"	1	18	13.00	5.8125	18.947
E-TRE 3 1/2	3-1/2"	1	26	15.00	6.75	22.218
E-TRE 4	4"	1	33	16.00	6.9375	23.437
E-TRE 5	5"	1	45	24.00	11.125	36.156
E-TRE 6	6"	1	48	30.00	12.4375	41.460



E468594
1/2"-4" meet UL 6 and ANSI C80.1
Federal Specification WW-C-563

Rigid Elbows

45° - Galvanized Steel

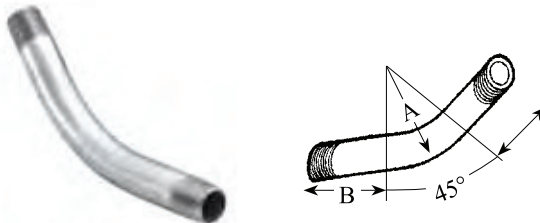

Features

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

Applications

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

Standard Material

- Galvanized steel

Catalog Number	Size	Ship Case	Weight/Case	(A) Min. UL Radius	(B) Straight Leg Each End
E-TRE 1/2 x 45	1/2"	50	26	4.00	2.875
E-TRE 3/4 x 45	3/4"	50	38	4.50	2.875
E-TRE 1 x 45	1"	35	45	5.750	3.00
E-TRE 1 1/4 x 45	1-1/4"	30	60	7.250	3.25
E-TRE 1 1/2 x 45	1-1/2"	15	45	8.250	3.625
E-TRE 2 x 45	2"	15	68	9.5	4.1875
1E-TRE 2 1/2 x 45	2-1/2"	1	8	10.5	5.25
E-TRE 3 x 45	3"	1	13	13.00	5.8125
E-TRE 3 1/2 x 45	3-1/2"	1	16	15.00	6.75
E-TRE 4 x 45	4"	1	22	16.00	6.9375
E-TRE 5 x 45	5"	1	45	24.00	8.125
E-TRE 6 x 45	6"	1	71	30.00	13.25



E468594
1/2" to 4" meet UL 6 and ANSI C80.1
Federal Specification WW-C-563