

Conduit Spacer Bar Saddle • Yükseltilmiş Çift Delikli Kroşe

Galvanized Steel • Galvanizli Çelik



Features:

- Available sizes: 20MM, 25MM, 32MM
- Standard: BS4568 / EN500863

Applications

- To provide space between conduits and mounting surface as well as to support conduits to mounting surface.


Standard Material

- Hot-Dip galvanized

Catalog Number	Size		Outer Diameter		Thickness (mm)	Thread Length (mm)	
	(in)	(mm)	Min.	Max.		Min.	Max.
E-LSP020	1/2	20	19.7mm	20.0mm	1.6 ±0.15	13.0mm	15.0mm
E-LSP025	3/4	25	24.6mm	25.0mm	1.6 ±0.15	16.0mm	18.0mm
E-LSP032	1	32	21.6mm	32.0mm	1.6 ±0.15	18.0mm	20.0mm
E-LSP040	1 1/2	40	39.5mm	40.0mm	1.6 ±0.15	19.0mm	22.0mm
E-LSP050	2	50	49.5mm	50.0mm	1.6 ±0.15	19.0mm	22.0mm

Conduit Hangers • Boru Asma Kelepçeleri

With Bolt & Nut Attached - Steel • Civata ve Somun Dahil - Çelik

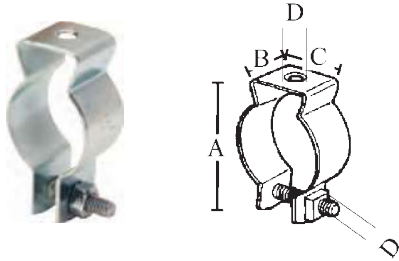

Features

- Assembled with nut and bolt

Applications

- Indoor or outdoor use
- Use to secure and suspend conduit from overhead supports

Standard Material

- Steel

Standard Finish

- Zinc plated



Catalog Number	Size	For Rigid	For EMT	Bolt Size	Ship Case	Weight/Case	Dimensions (in)			
							A	B	C	D
E-CH-0 WBA	0	3/8" - 1/2"	1/2"	1/4" - 20	100	6	1.875	.750	.725	.25
E-CH-1 WBA	1	3/4"	3/4"	1/4" - 20	100	8	2.125	.750	.850	.25
E-CH-2 WBA	2	1"	1"	1/4" - 20	100	8	2.437	.875	.975	.25
E-CH-3 WBA	3	1-1/4"	1-1/2"	1/4" - 20	100	10	2.75	.875	.975	.25
E-CH-2 1/2 WBA	2-1/2	---	1-1/4"	1/4" - 20	100	10	2.875	.875	1.050	.25
E-CH-4 WBA	4	1-1/2"	---	1/4" - 20	100	18	3.125	1.000	1.125	.25
E-CH-5 WBA	5	2"	2"	1/4" - 20	50	10	3.875	1.000	1.145	.25
E-CH-6 WBA	6	2-1/2"	2-1/2"	5/16" - 18	50	11	4.625	1.250	1.225	.3125
E-CH-7 WBA	7	3"	3"	5/16" - 18	25	6	5.500	1.250	1.275	.3125
E-CH-8 WBA	8	3-1/2"	3-1/2"	5/16" - 18	25	8	5.750	1.250	1.275	.3125
E-CH-9 WBA	9	4"	4"	5/16" - 18	25	12	6.250	1.250	1.275	.3125