


## FMC - Square locked

**FMC : Flexible Metal Conduit – Square locked**

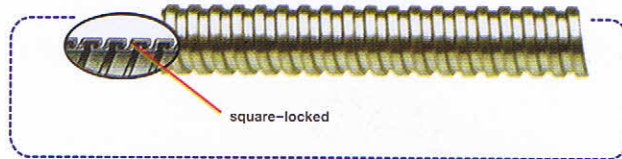

Nominal Size (Inch.)	Inter Diameter		Outside Diameter		Length of Each Roll m.
	min mm.	max mm.	min mm.	max mm.	
1/2"	12.20	12.80	15.00	15.80	50
3/4"	18.60	19.50	21.50	22.50	50
1"	24.60	25.60	28.00	28.80	30
1 1/4"	31.50	32.30	36.60	38.00	15
1 1/2"	37.80	38.50	41.60	43.00	15
2"	49.80	50.60	55.20	56.20	15
2 1/2"	62.50	63.50	69.40	70.80	10
3"	75.50	76.50	82.50	83.80	10
4"	101.50	102.50	108.00	109.10	10

The above data might be changed without prior notice . Special sizes are available on request.

**Product :**


- Good mechanical protection.
- Economic type, light weight, square locked.
- High flexibility.
- Low fire hazard
- Resistant to high temperature.
- Available in galvanized steel, Stainless steel and aluminium.

**Application :** Suitable for the following potentials :

- Underfloor for computer and floor boxes.
- Machine tools.
- High rise building.
- Area subject to heat and sparks.

## FMC- Interlocked (Arrowpipe)

**FMC : Flexible Metal Conduit – Interlocked**

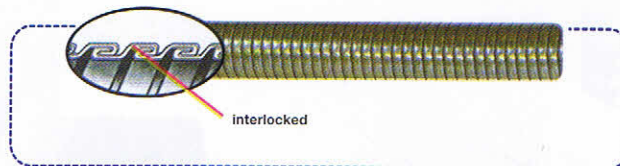

Nominal Size (Inch.)	Inter Diameter		Outside Diameter		Length of Each Roll m.
	min mm.	max mm.	min mm.	max mm.	
1/2"	15.80	16.50	18.20	18.90	50
3/4"	20.70	21.60	23.20	23.90	50
1"	26.00	27.00	29.20	30.00	30
1 1/4"	35.00	35.80	38.30	39.00	15
1 1/2"	40.20	41.00	43.30	44.20	15
2"	51.00	51.80	54.20	56.00	15
2 1/2"	62.80	64.20	67.50	68.60	10
3"	77.80	79.00	82.80	84.00	10
4"	101.20	102.80	106.00	107.60	10

The above data might be changed without prior notice . Special sizes are available on request.

**Product :**

- Good mechanical protection.
- High tension, Heavy duty–interlocked.
- High flexibility.
- Low fire hazard.
- Resistant to high temperature.
- Available in galvanized steel, Stainless steel and aluminium.

**Application :** Suitable for the following potentials :

- Underfloor for computer and floor boxes.
- Machine tools.
- High rise building.
- Area subject to heat and sparks.
- Computer / Telephone / controller.